

# LED LAMP


## E5 SERIES

### WAVE DOWNLIGHT

www.aigostar.com



#### ◆INSTALLATION DIAGRAM

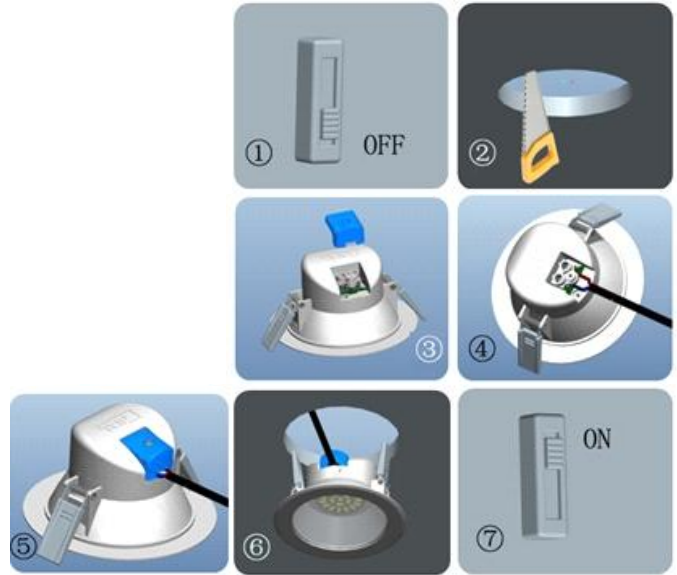


<b>V</b>	220-240V	On/Order/Off	≥20,000
	30000H		90°
<b>Ra</b>	≥ 80	<b>Hg</b>	<0.1%
<b>PF</b>	> 0.5-0.9	<b>EEL</b>	A+
<b>IP</b>	44		optimal Ta=-20°~40°

**DAY LIGHT** 6000K **NATURAL WHITE** 4000K **WARM WHITE** 3000K


PACKING 1pc/colour box

#### Size


E5 DL03 7W

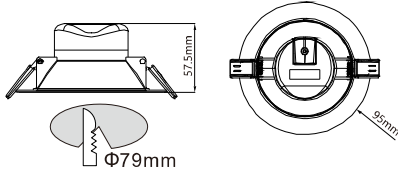

E5 DL03 8W

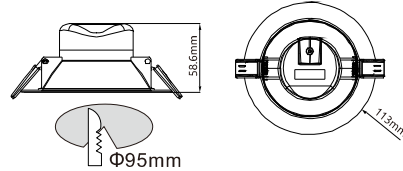

E5 DL03 10W

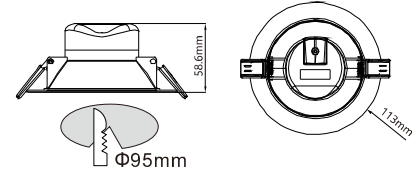

product code	Model	K	W	LM	mA	Chip QTY	PCS CTN	kWh/1000h	Certification
000348	E5 DL03 7W	6000K	7	580	150	14	120	7	CE, ROHS
000355	E5 DL03 7W	4000K	7	560	150	14	120	7	CE, ROHS
000362	E5 DL03 7W	3000K	7	530	150	14	120	7	CE, ROHS
000379	E5 DL03 8W	6000K	8	720	240	16	80	8	CE, ROHS
000386	E5 DL03 8W	4000K	8	700	240	16	80	8	CE, ROHS
000393	E5 DL03 8W	3000K	8	650	240	16	80	8	CE, ROHS
179090	E5 DL03 10W	6000K	10	900	160	20	80	10	CE, ROHS
000409	E5 DL03 10W	4000K	10	850	160	20	80	10	CE, ROHS
182489	E5 DL03 10W	3000K	10	800	160	20	80	10	CE, ROHS



#### warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.

# LED LAMP

## E5 SERIES


### WAVE DOWNLIGHT

www.aigostar.com




## SPECTRUM >>>


E5 DL03 7W 6000K

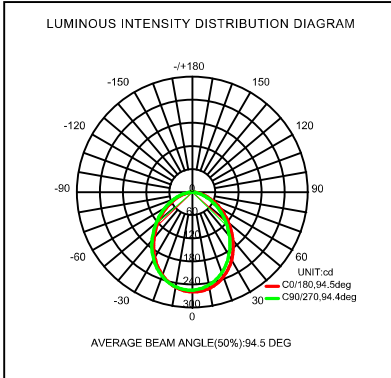


E5 DL03 7W 4000K

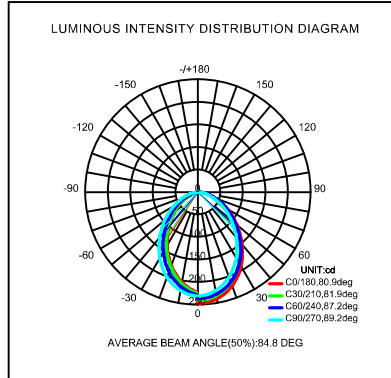


E5 DL03 7W 3000K

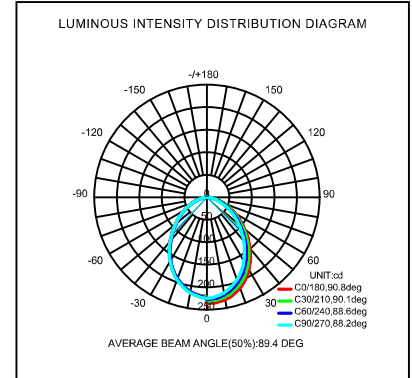


E5 DL03 10W 6000K

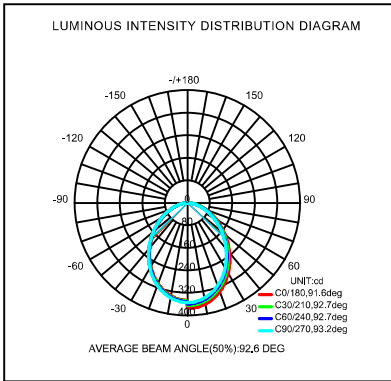



E5 DL03 10W 4000K

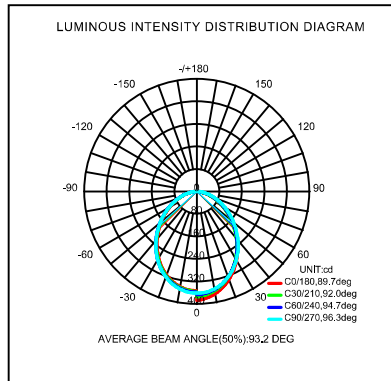



E5 DL03 10W 3000K

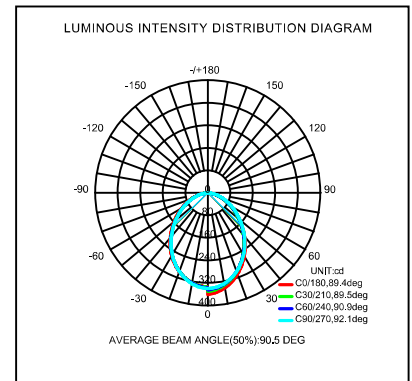



E5 DL03 8W 6000K

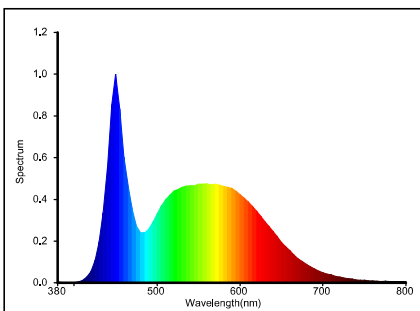

E5 DL03 8W 4000K

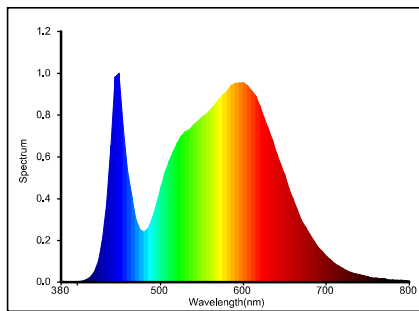

E5 DL03 8W 3000K

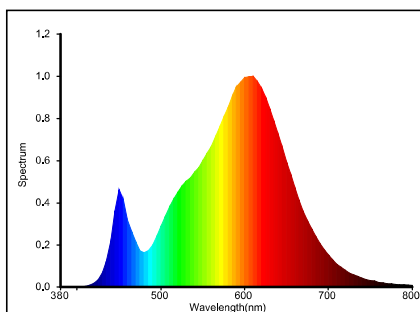

#### warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.